

Research Paper



Soil erosion risk mapping with RUSLE model using GIS and remote sensing techniques; A case study of Quetta Sub-basin (Pakistan)



Imad Ali¹, Maryam Byati khatibi^{2*}



This paper is an open access and licenced under the CC BY NC licence.



DOI: 10.22034/hyd.2024.62212.1744

Reference to this article: (2023). Imad Ali, Maryam Byati khatibi(2024). Soil erosion risk mapping with RUSLE model using GIS and remote sensing techniques; A case study of Quetta Sub-basin (Pakistan)A case study of Quetta Sub-basin (Pakistan),11(41): 67-86.

Keywords

Soil erosion;
RUSLE model;
GIS;
Geospatial data;
Quetta sub-basin

ABSTRACT

Soil erosion is a widespread issue causing land degradation globally. This study aims to determine the spatial distribution of annual soil erosion through the utilization of the Revised Universal Soil Loss Equation (RUSLE) model in a sub-basin, situated in the southwestern region of Pakistan. To accomplish this, numerous data mining techniques were employed, along with machine learning algorithms, to produce thematic layers (K, R, LS, C, and P) that served as input parameters for the RUSLE model. According to the resultant model, soil erosion in the study area ranged from 0.00 to 866 tons per hectare per year. The estimated values for rainfall-runoff erosivity (R), soil erodibility (K), topography (LS), and cover management (C), factors ranged from 147 to 191 ($\text{MJ.mm.ha}^{-1}.\text{h}^{-1}.\text{year}^{-1}$), 0.0229 to 0.0259 ($\text{t.ha.MJ}^{-1}.\text{mm}^{-1}$), 0.002 to 360.77, and 0.001 to 1, respectively. The statistics revealed that 58% of the land in the study area experiences a very low degree of soil erosion, at an erosion rate less than 13.58 t/ha/year. About 24% of the study area faces low erosion, with an erosion rate spanning from 13.58-44.16 t/ha/year. 13% of the area is demarcated as moderate soil erosion severity, at an erosion rate ranging from 44.16-81.53.14 t/ha/year. On the other hand, 5% of the study area experienced high to very high soil erosion, with an erosion rate of 81.53-866.34 t/ha/year. The northern part (Takatu range), north-eastern part (zarghoon range) eastern-central (Murder range), and western-southern (Chiltan range), which are characterized by steep slopes and barren land, experience high to very high severity of soil erosion. Conclusively Remote Sensing and GIS, in combination with the RUSLE model, are significant for identifying input factors for modeling soil erosion and resource management. This study will assist policymakers in pinpointing the erosion-prone areas in the hill tracts that urgently need soil conservation measures. Additional lack in upto-date field data himpered in model validation, hence is recommended to conduct field based studies to validate the model-derived results and create a reliable soil erosion database for the study area.

Receive Date: 2024/06/22

Accept Date: 2024/07/13

Available: 2024/01/19

* Corresponding Author: Maryam bayati khatibi
E-mail: m5khatibi@yahoo.com...

1- Ph.D Student, Department of Remote Sensing and GIS, University of Tabriz, Iran, imadali_khan@yahoo.com

2- Professor, Department of Remote Sensing and GIS, University of Tabriz, Iran, m_bayati@tabrizu.ac.ir

مقاله پژوهشی



پهنه بندی محدوده های در خطر فرسایش خاک با استفاده از RUSLE با استفاده از تکنیک های GIS & RS، مطالعه موردی: زیرحوضه کویت (پاکستان)



عماد علی، مریم بیاتی خطیبی*



این مقاله به صورت دسترسی باز و با لایسنس CC BY NC کپیروایتی کاملاً قابل استفاده است.



ارجاع به این مقاله: عماد علی و مریم بیاتی خطیبی* (۱۴۰۳). پهنه بندی محدوده های در خطر فرسایش خاک با استفاده از RUSLE با استفاده از تکنیک های GIS & RS، مطالعه موردی: زیرحوضه کویت (پاکستان) (شماره): 86-67.

DOI:10.22034/hyd.2024.62212.17



چکیده

کلیدواژه‌ها

فرسایش خاک یک موضوع گسترده جهانی است که باعث تخریب زمین در سطح جهان می شود. هدف این مطالعه تعیین میزان توزیع فضایی فرسایش سالانه خاک از طریق استفاده از مدل بازبینی شده جهانی و هدر رفت خاک (RUSLE) در یک زیرحوضه، واقع در منطقه جنوب غربی پاکستان است. برای انجام این کار، تکنیک‌های داده کاوی متعدد، همراه با الگوریتم‌های یادگیری ماشین، برای تولید لایه‌های نقشه های موضوعی (P و K، LS، R، K) که به عنوان پارامترهای ورودی برای مدل RUSLE عمل می کردند، استفاده شد. بر اساس مدل به دست آمده، فرسایش خاک در منطقه مورد مطالعه از ۰/۰۰ تا ۸۶۶ تن در هکتار در سال و همچنین مقادیر تخمین زده شده برای فرسایش بارندگی-رواناب (R)، فرسایش پذیری خاک (K)، توپوگرافی (LS) و مدیریت پوشش (C)، عوامل از ۱۴۷ تا ۱۹۱، ۰/۰۲۲۹ تا ۳۶۰،۷۷۰،۰۰۲۵۹ و ۰/۰۰۱ (MJ.mm.ha-1.h-1) به ترتیب متغیر است. آمارها نشان داد که ۵۸ درصد از اراضی منطقه مورد مطالعه درجه بسیار پایینی از فرسایش خاک را با نرخ فرسایش کمتر از ۱۳،۵۸ تن در هکتار در سال تجربه می کنند. حدود ۲۴ درصد از منطقه مورد مطالعه با فرسایش کم مواجه است که نرخ فرسایش بین ۱۳،۵۸-۴۴،۱۶ تن در هکتار در سال است. درصدی از منطقه با شدت فرسایش متوسط خاک، با نرخ فرسایش ۴۴،۱۶-۸۱،۵۳ تن در هکتار در سال مشخص شده است. از سوی دیگر، ۵ درصد از منطقه مورد مطالعه فرسایش خاک بالا تا بسیار زیاد، یعنی با نرخ فرسایش ۸۱،۵۳-۸۶۶،۳۴ تن در هکتار در سال را تجربه کرده اند. قسمت شمالی (محدوده تاکاتو)، قسمت شمال شرقی (محدوده زرغون) شرقی-مرکزی (محدوده قتل) و غربی-جنوبی (محدوده چیلان) که با شیب های تند و زمین های بایر مشخص می شود، دارای شدت زیاد تا بسیار زیاد است. نتایج حاصل از فرسایش و مدیریت منابع به سیاستگذاران در تعیین دقیق مناطق مستعد فرسایش در نواحی تپه ای که نیاز فوری به اقدامات حفاظتی خاک دارند، کمک خواهد کرد. کمبود اطلاعات به روز گاه موجب کاهش اعتبار سنجی مدل می شود. از این رو توصیه می شود مطالعات میدانی برای اعتبارسنجی مدل انجام شود تا یک پایگاه داده قابل اعتماد برای بررسی فرسایش خاک برای منطقه مورد مطالعه ایجاد شود.

فرسایش خاک، مدل RUSLE، GIS، داده های مکان مبنا، زیر حوضه کویت.

تاریخ دریافت: ۱۴۰۳/۰۴/۰۲

تاریخ پذیرش: ۱۴۰۳/۰۴/۲۳

تاریخ انتشار: ۱۴۰۳/۱۰/۳۰

نویسنده مسئول: مریم بیاتی خطیبی M5khatibi@yahoo.com

۱- دانشجوی دکتری، دانشکده برنامه ریزی و علوم محیطی، دانشگاه تبریز

۲- استاد گروه سنجش از دور، دانشکده برنامه ریزی و علوم محیطی، دانشگاه تبریز

Extended Abstract

Introduction

Soil erosion is a pressing geo-environmental concern that poses a significant threat to the agricultural sector on a global scale (Robinson et al., 2017). Soil erosion also referred to land degradation, is a major problem that can lead to a range of critical issues. It can have a distressing impact on the ecosystem and the biodiversity it supports (Panagos et al., 2016). The Land degradation has emerged as a momentous threat worldwide, impacting over 2.6 billion people across 100+ countries. Asia has been hit hardest, trailed by Africa and Europe. In developing countries, climate change and anthropogenic activities have fueled the rate of land degradation (Kebede et al., 2021; M. C. Singh et al., 2023). The process of erosion is influenced by a multitude of biophysical and environmental factors, which can interact with each other in complex ways. It is often linked to unsustainable human practices such as deforestation and intensive agriculture. The intricate interplay between land usage, topography, rainfall intensity, and soil types are the root causes of soil erosion (Bayati, 2016; Kayet et al., 2018). Previous studies have identified soil erosion as a critical factor leading to the loss of topsoil and degradation of farmland (Dutta et al., 2015; Qin et al., 2018; Shit et al., 2015). Furthermore, it has been discovered in several studies (Gelagay & Minale, 2016; Panditharathne et al., 2019; R. Ullah et al., 2023) that the erosion can transport harmful materials downstream and contaminate water bodies. Overall Soil erosion has negative effects on the environment through depleting soil nutrients, water quality deterioration and agricultural productions, resulting in economic costs and human casualties. Evaluating and mapping soil erosion helps identify areas for implementing control measures and mitigation practices.

Over the years, there has been an increasing concern about the state of soil resources worldwide, leading to a surge in global interest in the preservation and restoration of this vital resource. As a result, various initiatives and efforts have been put in place to ensure the sustainable use of soil and promote its health and productivity. To better understand and predict the severity of soil loss/erosion over time, various models have been adopted. Some of these widely used soil erosion prediction models include, Water Erosion Prediction Project (WEPP), Universal Soil Loss Equation (USLE), Modified Universal Soil Loss Equation (MUSLE), Revised Universal Soil Loss Equation (RUSLE), European Soil Erosion Model (EUROSEM), Agricultural Nonpoint Source model (AGNPS), and the Erosion Productivity Impact Calculator (EPIC). The selection and implementation of a suitable soil erosion model is reliant upon several factors, namely; the availability of data, and the spatial and temporal scales of the application of model. The choice of model should be carefully considered with due regard to the size of the selected area, and the duration of the study period. Many other factors such as soil characteristics, land use, and climate must also be taken into account when choosing the most appropriate model. By cautiously assessing these factors, the desired level of accuracy and effectiveness can be attained in the results. Among these models/equations, RUSLE is the most commonly used as it is capable of accurately calculating annual soil loss and can be easily integrated with both ArcGIS environment and satellite data. This makes it a powerful tool for predicting and managing soil erosion in various regions (Fiener et al., 2020; Ghosal & Das Bhattacharya, 2020).

In Pakistan, agriculture has been the backbone, but wind and water erosion affect more than 76% of the land, encompassing approximately 16 million hectares and resulting in the loss of around 1 billion tons of fertile soil annually (Pimentel & Burgess, 2013). This poses a risk to both the livestock sector and ecological stability, and it also jeopardizes the potential for sustainable economic growth (Anjum et al., 2010; Gilani et al., 2022). Even though RUSLE is widely used for estimating and mapping soil erosion around the world, its use in Pakistan has been limited. A very few studies have been conducted in the northern part of the country by M. Abuzar (2012), M. K. Abuzar et al. (2018), Ashraf (2020), Ashraf et al. (2017), Nasir et al. (2006), and S. Ullah et al. (2018). In study area, estimating and measuring the soil erosion is challenging due to factors like lack of field data availability, difficult terrain, and biodiversity. In such restricted condition area geospatial technology provide a cost effective tools to portaray this envirmntal issue. The present study is an attempt to utilize geospatial technology for estimation of spatial distribution of soil erosion in south-western part of the country (Pakistan). The main objective of the current research is to utilize the RUSLE model,

geospatial data, and GIS tools to estimate the annual soil erosion in Quetta sub-basin, Pakistan. Precisely, the study aims to apply the RUSLE model, scrutinize the relevant erosion factors and determine the rate of soil erosion in the study area to evaluate the extent and severity of soil erosion rate within specified region.

Methodology

Study site description

The Study area of Quetta sub-basin is part of the Pishin River Basin, falls within the geographic coordinates of 29°45'00" N to 30°30'00" N latitude and 66°45'00" to 67°20'00" E longitude (Figure 1). Based on climatic standpoint, the Quetta Sub-basin can be found in the upper highlands region and experiences semi-arid conditions. Its climate is classified as "sub-tropical continental highland," with mild to hot summers and harsh winters. The winter season lasts from October to March, with an average temperature of 3-5°C. The spring season occurs during April and May and has a temperature of around 15°C. The Summer spans from May to September, with temperatures ranging from 24-27°C, while autumn takes place from September to November and has an average temperature of 12°C. The study area has varied topography, including mountain ridges, depressions, and small plains. The sub-basin height raises towards the northeast of Quetta Valley, where the Zarghoon Range is located, the highest peak in the area (3570 masl). The Takatu, Chiltan and Murder Ghar ranges are also exposed in the north, west, and east respectively. The central part is largely flat, sloping gently southward. The average topographic elevation of the study area is 1650 masl (Ali & Aftab, 2022).

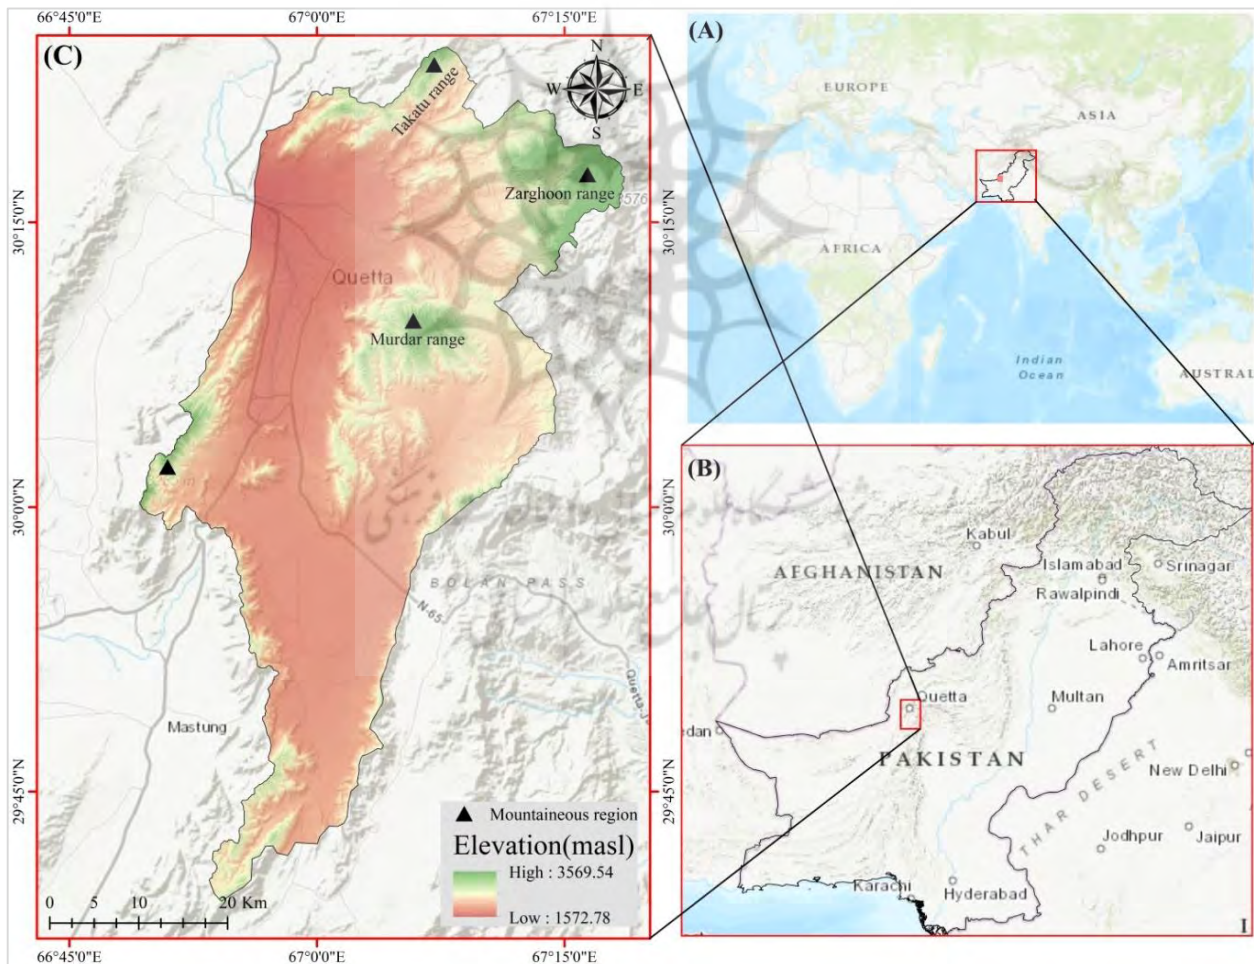


Figure 1: Location map of (A) World map (B) Country map (C) Study area (Quetta sub-basin).

In the current research, the methodology used is portrayed in Figure 2. Additionally, Table 1 provides an overview of the various datasets utilized in the study and their corresponding sources. The initial stage

involved the generation of a geospatial database containing all the necessary datasets for the RUSLE equation/model. These datasets were collected using a combination of geospatial techniques and machine learning algorithms to create thematic layers (R, K, LS, C, and P), which served as the input parameters for the RUSLE model. Subsequently, in the second stage, all acquired data was preprocessed, and thematic layers were generated from both satellite and conventional data within the ArcGIS environment. Geographic Information System (GIS) was the primary tool applied in the processing stage. Finally, in the last stage, the "Raster calculator" was used to overlay all thematic layers in order to produce the soil erosion map.

Datasets types and acquisition sources

Acquisition of data is the most important and critical step in research. ALOS PALSAR DEM 12.5m resolution was downloaded from Alaska official website (<https://asf.alaska.edu>). The precipitation data for the last 23 years (2000-2023) was acquired from, the Climate Hazards Group Infrared Precipitation with Stations (CHIRPS). LULC was downloaded from ESRI living atlas website. Soil related data was acquired from Harmonized World Soil Database (HWSD) v2.0 and SoilGrids 2.0. The estimation of all parameters related to RUSLE model are describe in proceeding sections.

The core objective of the current study was to employ the RUSLE model, geospatial data, and GIS tools to estimate the distribution of annual soil erosion in drought-prone Quetta sub-basin, Pakistan. Specifically, the study targets to apply the RUSLE equation/model, examine the relevant erosion factors and determine the average rate of soil erosion in the study area to evaluate the extent and severity of soil degradation in the specified region of Quetta. The approach involves merging various thematic layers into GIS 10.8 environment, in conjunction with a DEM, LULC, precipitation map, and soil map.

Table 1: Datasets types and its sources of acquisition

Dataset Type	Resolution	Data Source
DEM	12.5 m	https://asf.alaska.edu/data-sets/derived-data-sets/alos-palsar-rtc/alos-palsar-radiometric-terrain-correction/
LULC	10 m	https://livingatlas.arcgis.com/landcover/
NDVI	10 m	https://dataspace.copernicus.eu/
Soil type	1 km	https://www.fao.org/soils-portal/data-hub/soil-maps-and-databases/harmonized-world-soil-database-v20/en/
	250m	https://www.soilgrids.org/
Precipitation	5.3 km	CHIRPS Google Earth Engine

RUSLE model parameters estimation

The Revised Universal Soil Loss Equation (RUSLE) is widely-adopted empirical model that serves to estimate soil erosion developed by Renard (1997). This model takes into account various important factors that influence the erosion process of soil. These factors include rainfall intensity, the capacity of soil to erode, slope length, and the extent of vegetation cover. By considering all these factors, the RUSLE provides a comprehensive analysis of the potential risk of soil loss in a given area, making it an important tool for soil conservation and land management. RUSLE is an upgraded version of the Universal Soil Loss Equation (USLE), which was developed by Wischmeier and Smith (1978). Nowadays, RUSLE is widely accepted model/equation, used to estimate the potential annual soil loss. The RUSLE model by Renard (1997) was computed using equation.1:

$$A = R * K * LS * C * P$$

(1)

Where, A denotes soil loss over a selected period, usually on yearly basis ; R represents rainfall-runoff erosivity index/factor; K represents the soil erodibility factor; LS denotes the length of slope (L) and slope gradient (S) factors; C represents the cropping management factor; while P denotes the supporting conservation practice factor.

The methodological framework is presented in the following flowchart (shown in Fig. 2).

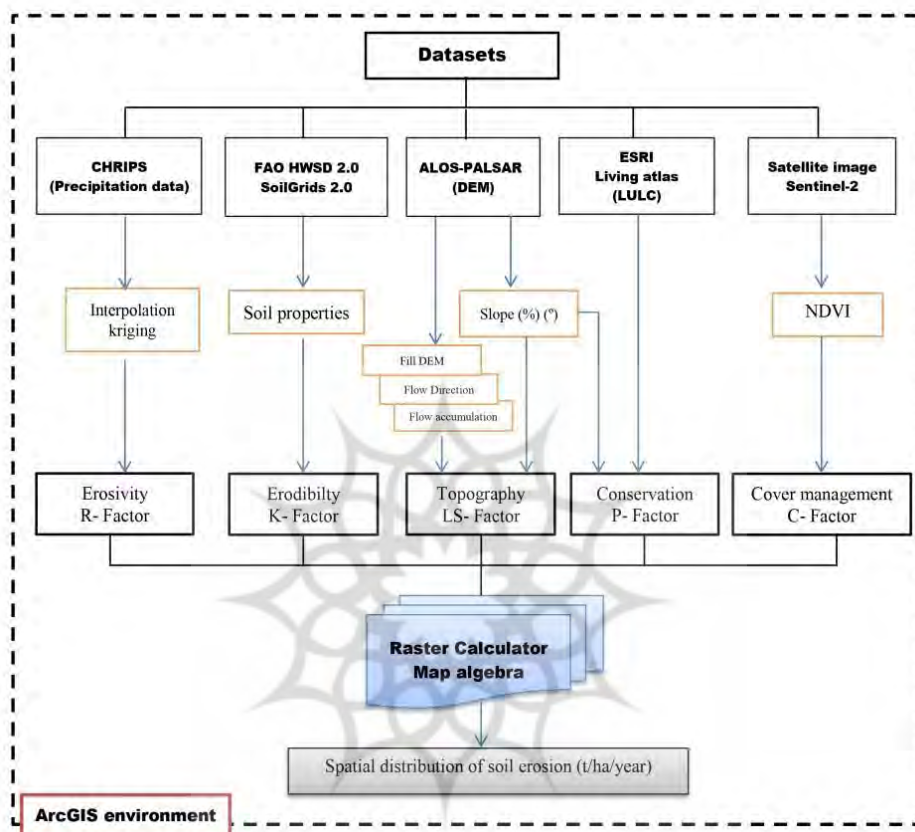


Figure 2: Methodological framework of the study

Rainfall erosivity factor (R) estimation

The R-factor is an essential parameter that replicates the impact of rainfall intensity on soil erosion, making it a vital component in accurately assessing soil erosion in a specific area (Wischmeier & Smith, 1978). It estimates the impact of rainfall in the form of kinetic energy and predicts the amount of runoff which is directly interconnected with the precipitation events in a region (Ghosal & Das Bhattacharya, 2020). The R-factor for RUSLE model input was calculated by equation.2 developed by G. Singh et al. (1981) as follow:

$$R = 79 + 0.363 * AAP \quad (2)$$

Where, R signifies the rainfall erosivity and AAP is Average Annual Precipitation rate.

In the light of insufficient weather station data, the CHIRPS precipitation data (from 2000-2023) was employed. The precipitation values for each grid cell were obtained in tabular format from Google Earth Engine. The Kriging interpolation in ArcGIS environment was then used to generate a continuous spatial distribution of precipitation for study area (Sadeghi et al., 2017).

Soil erodibility factor (K) estimation

The K-factor is an vital parameter that measures the susceptibility of soil to erosion. It is determined by analyzing the physical structure and profile characteristics of the soil (Renard, 1997). The K-factor, reflects how easily soil particles detach and move due to rainfall and runoff. While the texture plays the most significant role in determining K, factors like soil structure, organic matter content, and permeability also contribute (Stone & Hilborn, 2012). Research has revealed that the soil erodibility factor is influenced not only by particle size, but also by variables such as organic matter content, molecular bonding, structural classification, and permeability rate (Wischmeier & Smith, 1978). It is important to note that there are various equations utilized for the estimation of K-factor concerning annual soil loss. Soil erosion is a complex phenomenon governed by many factors, and an in-depth understanding of these equations can enable us to develop more effective strategies towards environmental conservation (Ghosal & Das Bhattacharya, 2020). As per the suitability to our study area equation.3 was used developed by Wischmeier and Smith (1978):

$$K = [(2.1 \times 10^{-4} M^{1.14} (12 - OM) + 3.25(S - 2) + 2.5(P - 3)] / 759 \quad (2)$$

Where, K represents the soil erodibility factor, M represents the grain size parameter, which is the product of the silt content (%) with (100% clay), OM represents % of organic matter, S is soil structure and P denotes permeability class of the soil.

As local soil data for the region is not readily available, we have utilized the Harmonized World Soil Database (HWSD) v2.0 and SoilGrids 2.0 to provide us with the necessary information. Developed collaboratively by FAO/IIASA/ISRIC/ISS-CAS/JRC in 2009, HWSD 2.0 offers the soil information for the entire world, broken down into 221 million grid cells across a detailed attribute database. it covers 21,600 rows and 43,200 columns, which provides a granular level of information for analysis. In contrast, SoilGrids 2.0 employs cutting-edge Machine Learning methods to generate the essential models using soil observations from around 240,000 locations worldwide, along with over 400 global environmental covariates describing vegetation, terrain morphology, geology, climate and hydrology (Poggio et al., 2021).

Slope length (L) and slope steepness (S) factor estimation

The LS factor is a crucial indicator that demonstrates the relationship between two key terrain features: the length of slope (L) and steepness of the slope (S). The LS measures the collective impact of these two factors on soil erosion, providing valuable insight into the topography of the land. Longer slopes tend to increase both the quantity and velocity of run-off, leading to greater erosion rates. Similarly, steeper slopes contribute to faster run-off velocity, further exacerbating erosion. The variation in slope steepness factor is the primary contributor to the differences in slope length and steepness (Ghosal & Das Bhattacharya, 2020). Many of the researchers have developed their own slope steepness factor while utilizing the slope length factor from Wischmeier and Smith (1978). In current study LS factor was calculated by equation.4 developed by Moore and Nieber (1989) as follow;

$$LS = \ln \left(\frac{A_s}{22.13} \right)^n \left(\frac{\sin \beta}{0.0896} \right)^m \quad (3)$$

Where, A_s represents the catchment area, while β denotes the slope gradient in degrees, $n = 0.4$ and $m = 1.3$. The Equation (4) was initially developed by Moore and Burch (1986) based on the unit stream power theory. But this equation is more suitable for calculating flow in landscapes with complex topographies than the original empirical equation. The " A_s " term in the equation.4 accounts for the both flow divergence and convergence (Moore & Nieber, 1989).

Cover and management factor (C) estimation

The C-factor is a significant measure used to assess the influence of different land management techniques, such as cropping and cover management, on the process of soil erosion. It takes into account the effects of

factors such as the type of vegetation, the planting density, and the level of ground cover on the soil's ability to resist erosion rate (Koirala et al., 2019). It also signifies the influence of ground cover, for agricultural environment it represents the influence by crop and there corresponding management practice in reducing soil loss, and in term of non-agricultural situations it represents ground covered by trees and grass (Renard, 1997) In order to determine the annual soil loss, a range of methods are utilized to calculate the C-factor. In this specific analysis, we have implemented a methodology that derives the C-factor through the assessment of vegetation indices, including the Normalized Difference Vegetation Index (NDVI), as outlined by Alexandridis et al. (2015). For this estimation, firstly NDVI was calculated using equation.6 as defined by (Tucker, 1979):

$$NDVI = \left(\frac{NIR - RED}{NIR + RED} \right) \quad (4)$$

The C-factor was then calculated by equation 6, as described in the study by Toumi et al. (2013).

$$C = 0.9167 - NDVI \times 1.1667 \quad (5)$$

Any positive value of C greater than 1 and negative value less than 0 was rescaled to the range of 0 and 1 in ArcGIS 10.8 environment using "Raster Calculator".

Conservation support practice factor (P) estimation

The P-factor is a measure of the effectiveness of a particular support practice in reducing soil loss over a region. Precisely, it is the ratio of soil loss when using a given conservation practice, compared to the amount of soil loss that would occur if the land were cultivated in the traditional up and down manners (Wischmeier & Smith, 1978). It refers to the set of techniques and methods that aim to slow down and weaken the flow of runoff, while also curtailing the extent of soil erosion (Yue-Qing et al., 2009). In order to evaluate the effectiveness of management activities, the P-factor is a useful metric that ranges from 0 to 1. A value of 1 indicates good practices, while values closer to 0 represent poor practices. Traditionally, slope percentages have been used to determine suitable P-factor values. However, in this research, a combined approach utilizing both LULC and slope percentage was employed to calculate the P-factor. LULC classes were assigned appropriate values based on their contribution to erosion, and slope values were also taken into consideration. The resulting P-factor values (Table.2) were then utilized to assess the level of erosion risk in the study area.

Table 2: Conservation practice values (Wischmeier & Smith, 1978).

Slope (%)	Land use types	P values
0 – 5	Agriculture land use	0.1
5 – 10	Agriculture land use	0.12
10 – 20	Agriculture land use	0.14
20 – 30	Agriculture land use	0.19
30 – 50	Agriculture land use	0.25
>50	Agriculture land use	0.33
0-100	Other Land use	1

Results and Discussions

Rainfall erosivity factor (R)

The study area of Quetta sub-basin lies in semi-arid climatic zone of the province. The province experiences the influence of two distinct meteorological phenomena, namely Western disturbances and Monsoon. In rare cases, oceanic and monsoon currents arising from the Arabian Sea can also extend to the southern region of the watershed, resulting in considerable precipitation. In the northern areas, the primary source of rainfall is

Western disturbances, which are more common during the months of February and March. Conversely, Monsoon is the pivotal source of rainfall in the southern regions of the Province, with major storms occurring in July and August. The average annual rainfall value of 188 to 309 mm indicated a moderate amount of rainfall. More than 60% of the area (Northern mountainous zones) was found to be experiencing more than 236mm rainfall annually. Overall, the precipitation distribution was experiencing an increasing gradient from North to South (shown in fig. 3).

The total amount of precipitation that occurs in a specific area is directly associated with the erosivity rate. The R-values of the study area (shown in fig.4) varied between 147 and 191 MJ mm/ha/hr/year, suggesting a moderate to high risk of erosion, especially on sloping lands of the northern and north-eastern part of the study area.

In Table 3, various classes of the R factor are portrayed together with their corresponding areas. Notably, 54% of the area exhibits high to very high values of the rainfall erosivity factor. Approximately 23% of area indicates a moderate level, while 23% demonstrates a low to very low R factor value for the study area. It is evident that there is a direct correlation between the distribution of rainfall and the erosivity factor. As rainfall decreases, the erosive force in the area also diminishes.

Table 3: R-factor classes and respective area

S.No	R-factor classes	Area(km ²)	Area (%)
1	147.370 - 155.472	191.3761	10.97
2	155.472 - 164.608	220.964	12.67
3	164.608 - 172.193	393.8949	22.59
4	172.193 - 181.156	665.5856	38.17
5	181.156 - 191.327	271.8022	15.58

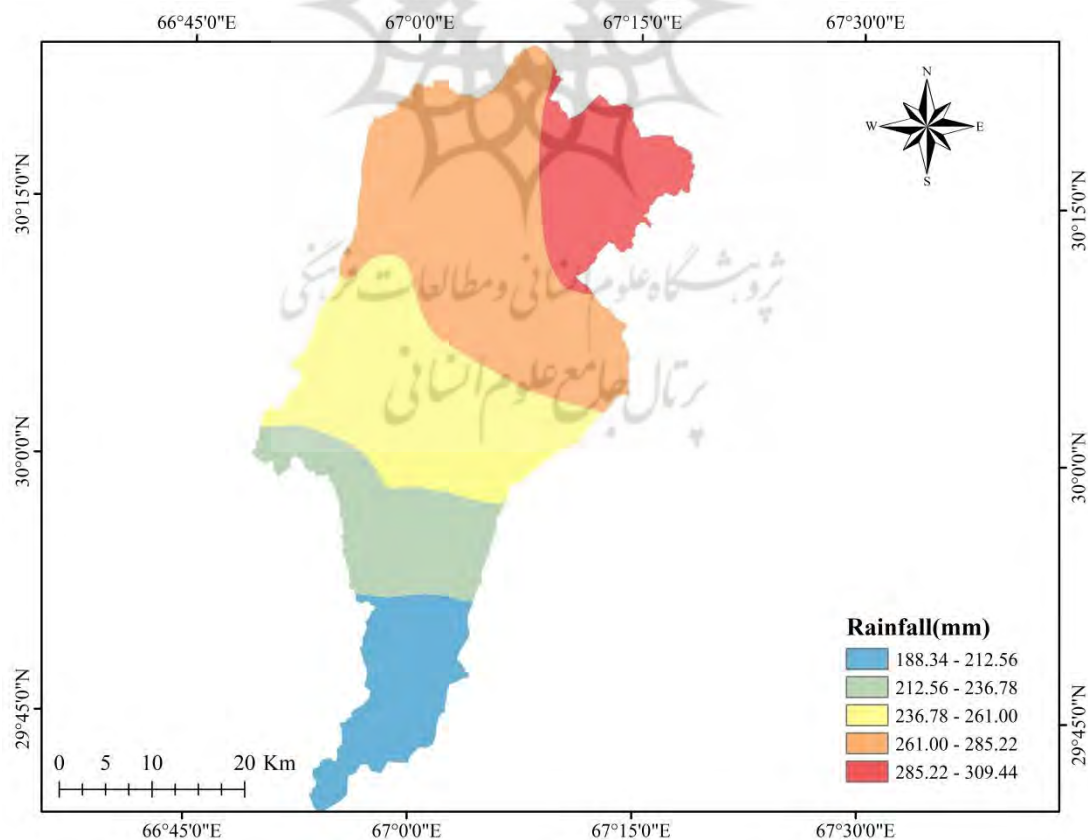


Figure 3: The Rainfall map of Quetta sub-basin

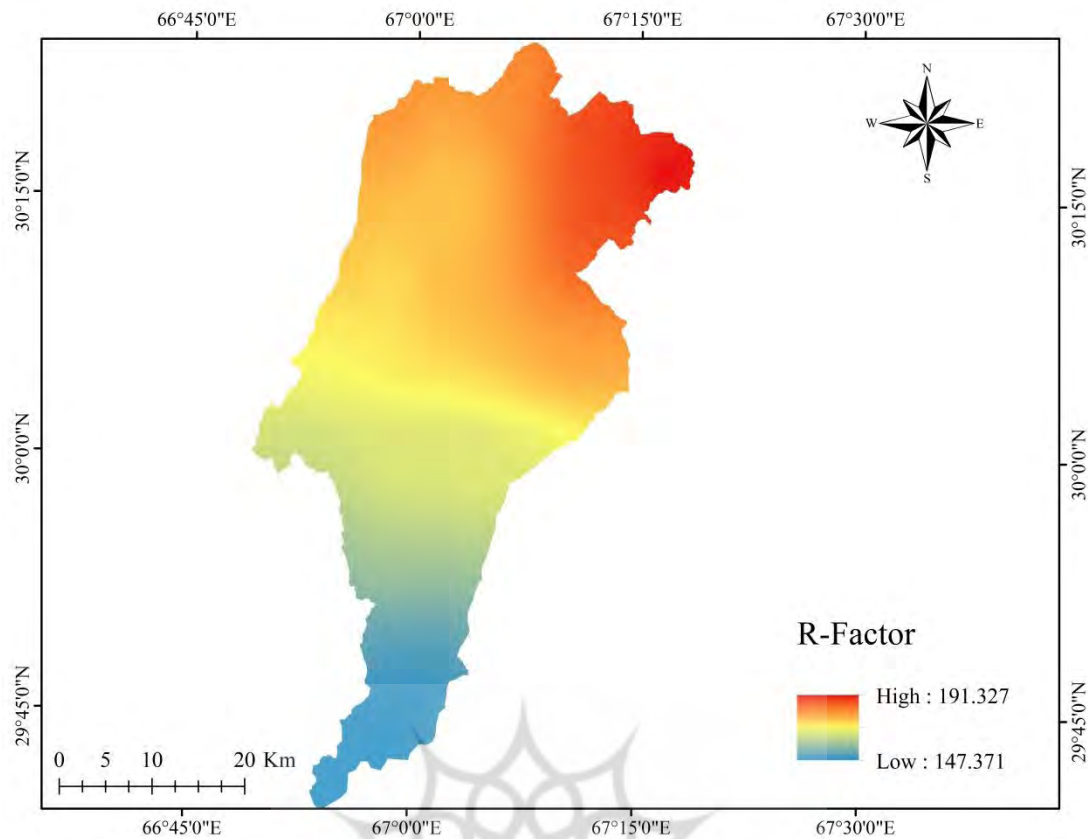


Figure 4: The R-factor map of Quetta sub-basin

Soil erodibility factor (K)

The study area comprises of seven distinct types of soil namely; Calcisols, Cambisols, Fluvisols, Gypsisols, Leptosols, Luvisols, and Regosols (shown in fig. 5). The Calcisols are the most prevalent soil type, covering 1347.64km² of the study area. Regosols cover nearly 300km², while leptosols cover 88.36 km², Cambisols cover 5.5 km², fluvisols cover 3 km², gypsisols cover 0.65km², and luvisols cover an area of 0.1 km². (<https://soilgrids.org>). The K factor reflects the natural erodibility of the soil, influenced by the properties like texture, organic matter contents, and its internal structure. The erodibility value of a soil is an important parameter that indicates its vulnerability to erosion. A soil with an erodibility value closer to 0 is less prone to erosion, whereas a value closer to 1 suggests that the soil is highly susceptible to erosion. In the study area, the most common soil texture is loam, and the K-factor values range from 0.0229 to 0.0259, (as shown in Fig, 6). Among the different types of soil present, Gypsisol and Fluvisol have the highest K-factor values at 0.0259 and 0.0258, respectively. On the other hand, the Luvisols and Cambisols exhibit the lowest erodibility values in this study, indicating a higher level of resistance to the erosion process.

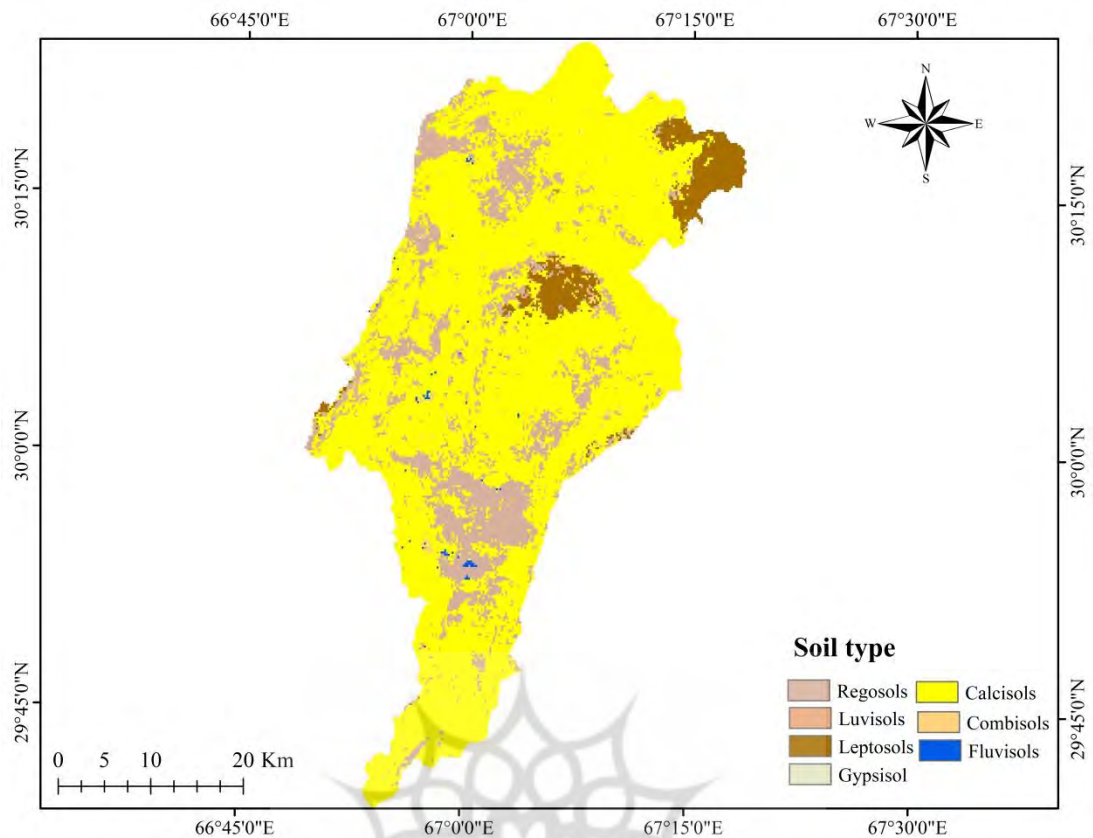


Figure 5: The soil types map of Quetta sub-basin

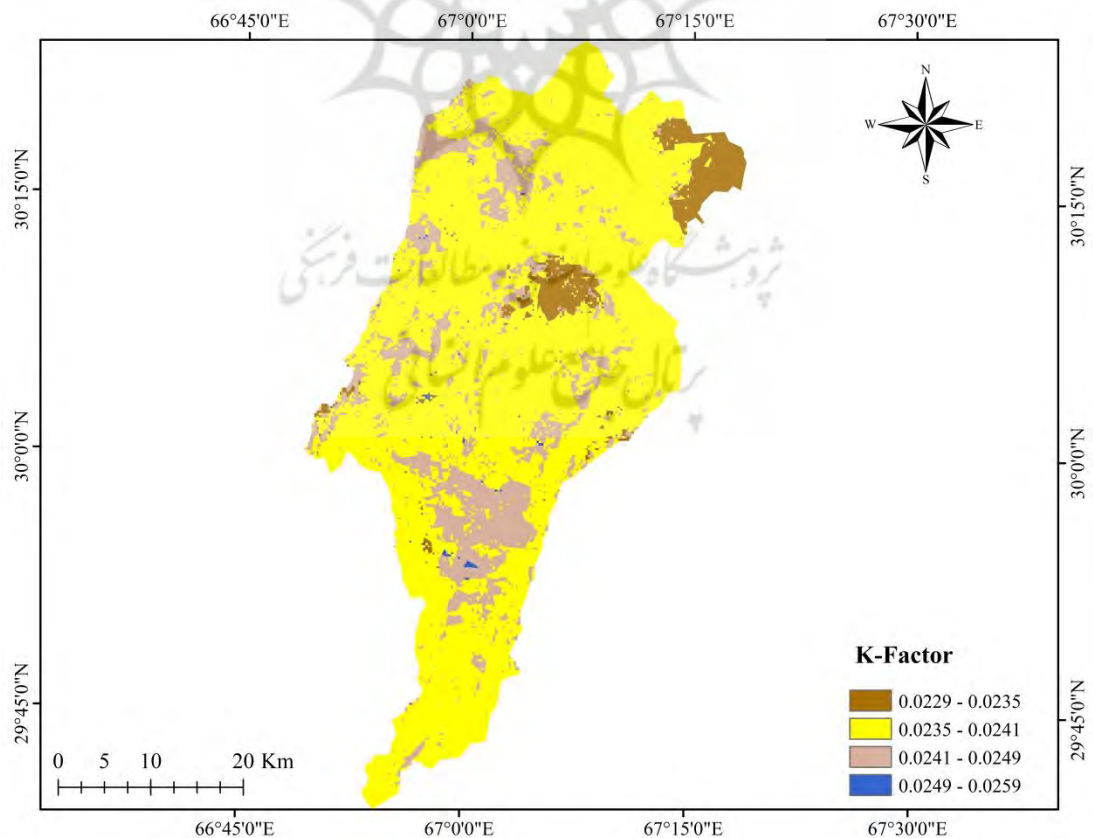


Figure 6: The K-Factor map of Quetta sub-basin

Slope length (L) and slope steepness (S) factor

The study area features a diverse topography, ranging in elevation from 1548 to 3532 meters. It is defined by high-elevation mountainous regions in the Northern (Takatu range) and North-eastern (Zarghoon range) areas, as well as along the sub-basin's boundary (as shown in figure 7). The LS values were classified into 5 categories, ranging from 0.002 to 360.77. Areas with values below 5.66 are mostly comprised of lowland terrain, encompassing the majority of the study area. Meanwhile, values exceeding 16.98 indicate rugged terrain with steep slopes surrounding the lowlands (shown in figure 8).

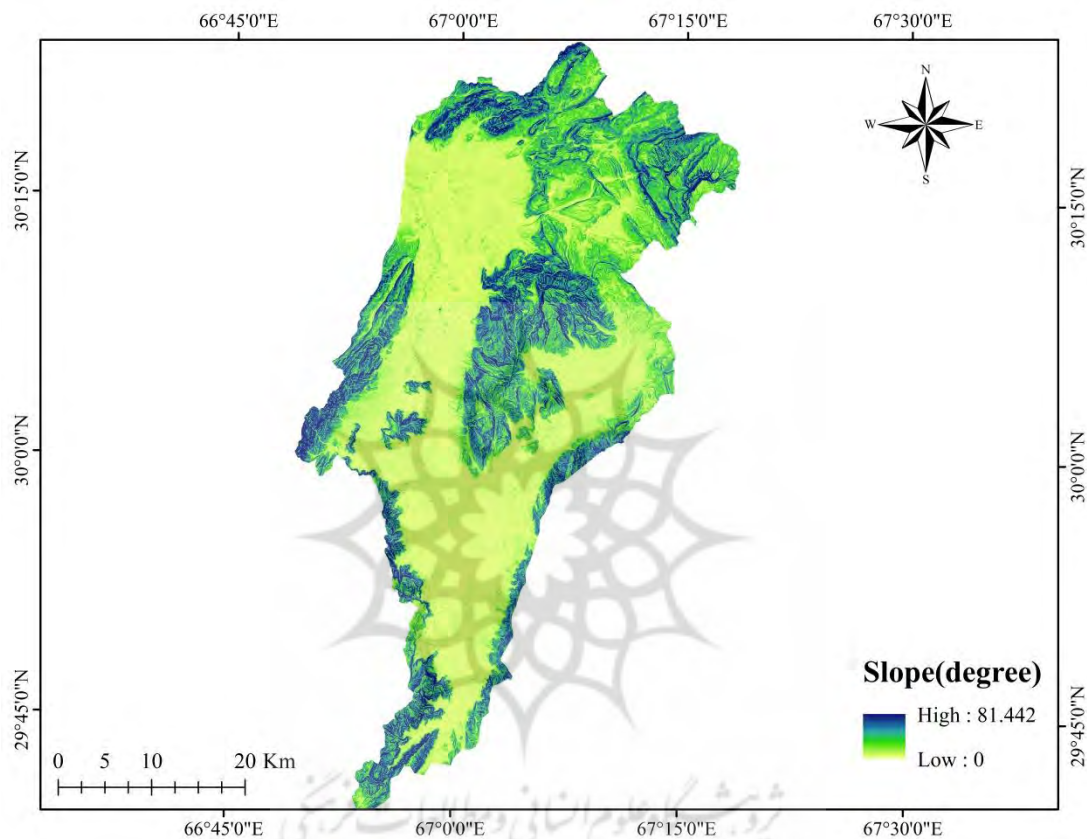


Figure 7: The slope map of Quetta sub-basin

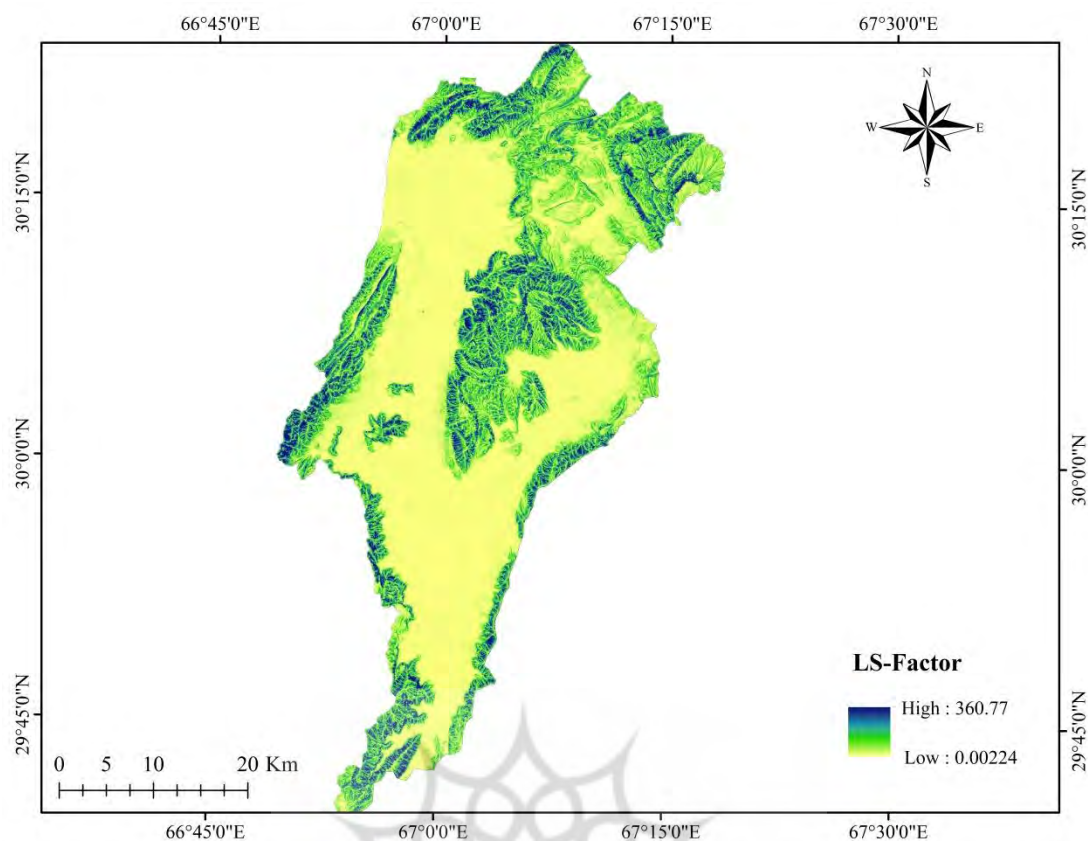


Figure 8: The LS factor map of Quetta sub-basin

Cover and management factor (C)

The C-Factor for the year 2023 was determined via NDVI calculations, where in a range of values between -0.25 and 0.56 were obtained (shown in fig, 9). These values served as an indicator of vegetation health, with higher values indicating healthier vegetation and lower values signifying the absence of vegetation, such as barren land and water bodies. The C-Factor values ranging from 0.25 to 1.21 were generated from the NDVI data. Finally positive value of C greater than 1 and negative value less than 0 was rescaled to the range of 0 and 1 in ArcGIS 10.8 environment using “Raster Calculator”. The C-Factor values range from 0.001 to 1 (shown in fig, 10). Particularly, it was observed that over 80% of the total area had a higher C-Factor value, symbolic of low vegetation and barren land.

پرتال جامع علوم انسانی

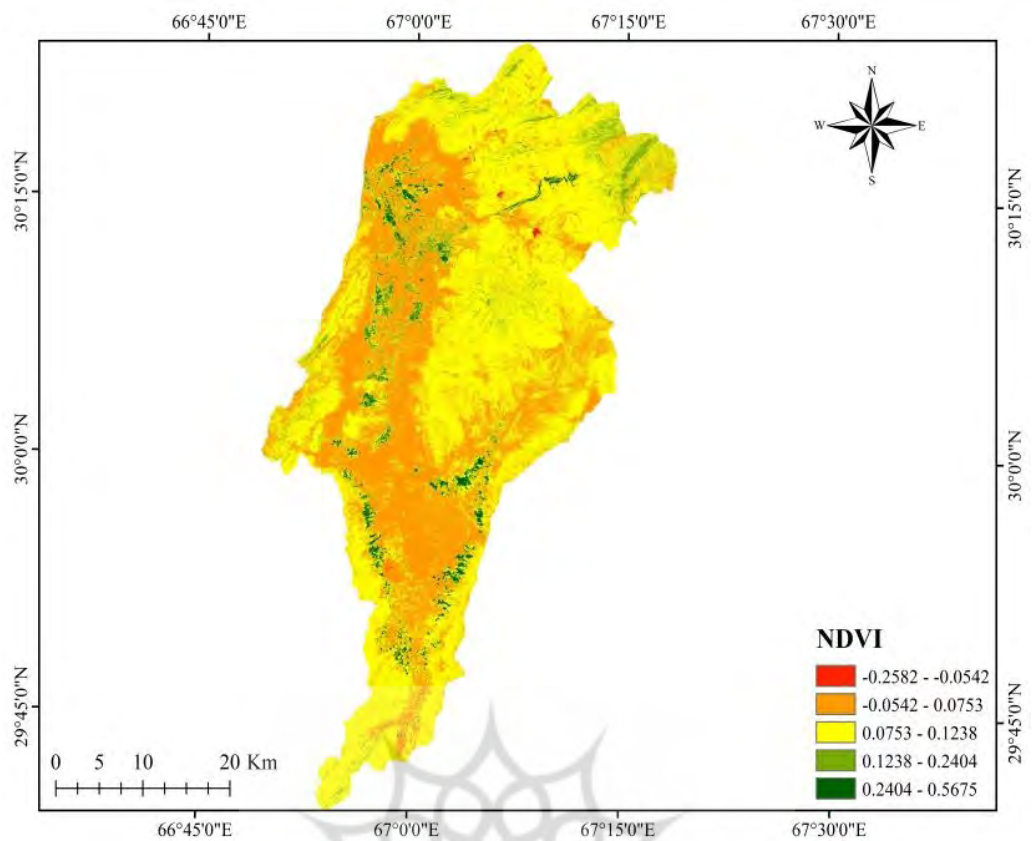


Figure 9:The NDVI map of Quetta sub-basin

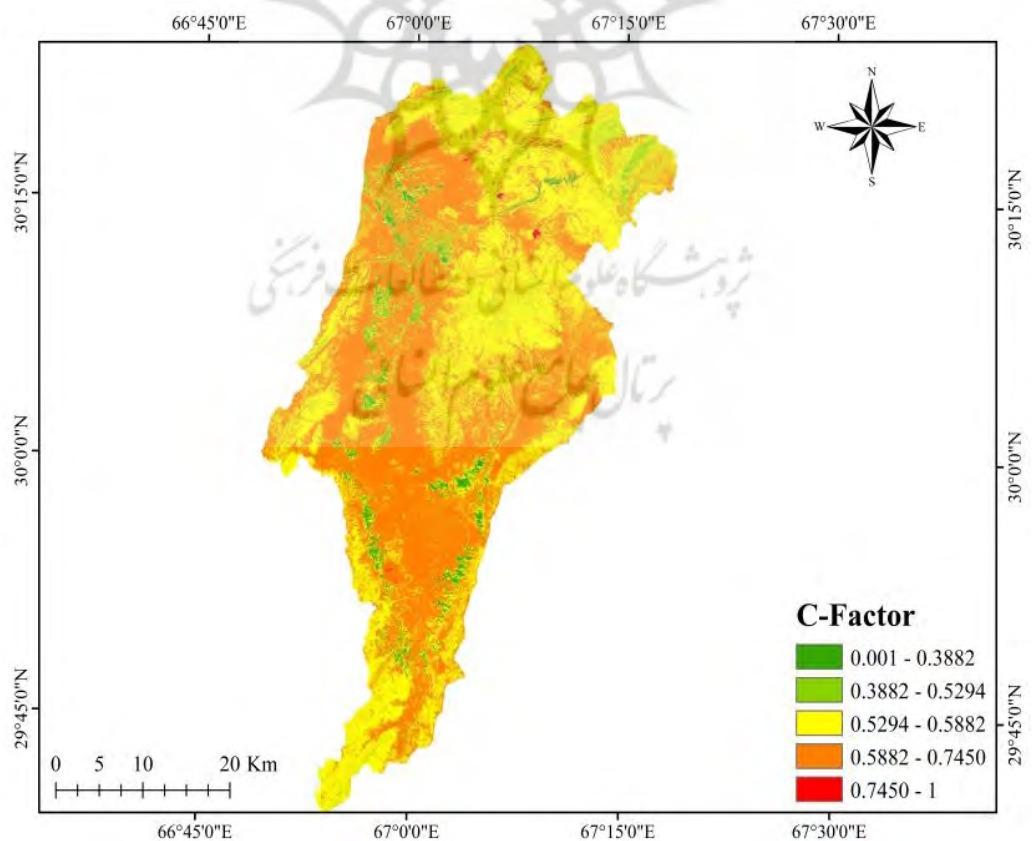


Figure 10:The C-Factor map of Quetta sub-basin

Conservation support practice factor (P)

The P-factor is a metric that quantifies the adherence to good or poor practice in land management, which can range from 0 to 1. A score of 1 designates that the land is being managed with good practices, while scores closer to 0 indicate a lack of good practices. In current study the P-factor is determined by considering the combined effects of slope and land use/cover (LULC), (shown in fig, 11). using predefined values. The resulting P-factor values range from 0.1 to 1, with 0.1 indicating poor practice and 1 indicating good practice (shown in fig, 12). It is noteworthy that built-up areas, rivers, and agricultural lands consistently receive a score of 1 for good practice, as demonstrated in research conducted by Morgan et al. (1999) and Wischmeier and Smith (1978).

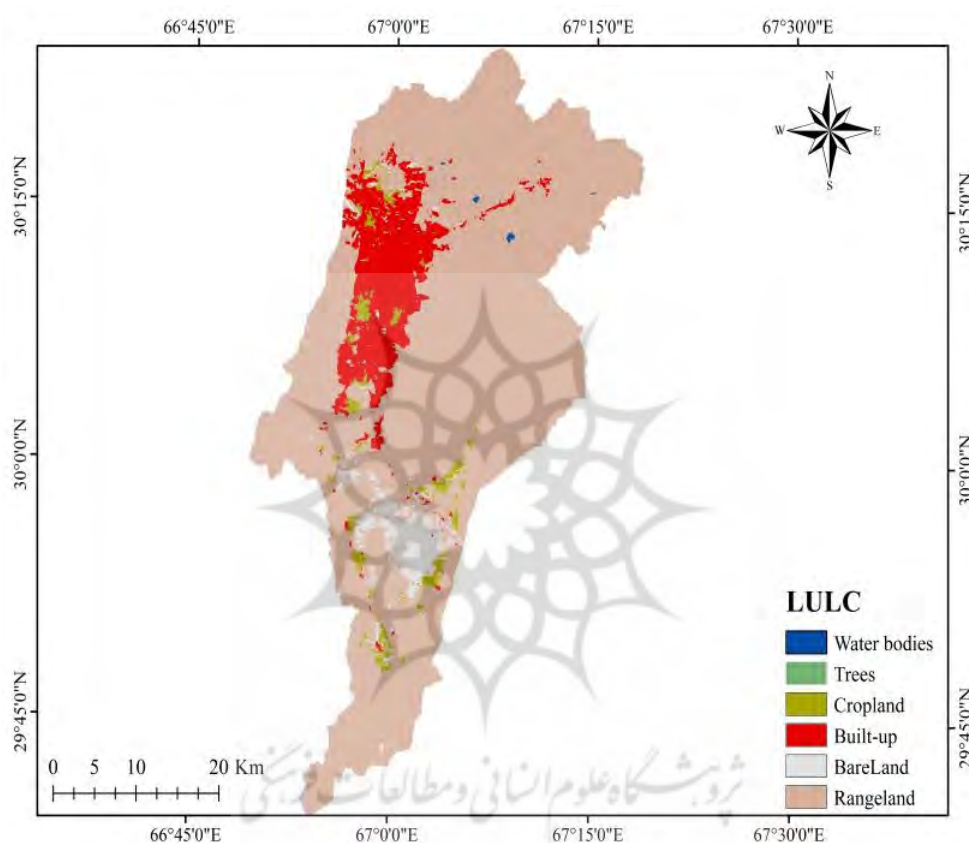


Figure 11: The LULC map of Quetta sub-basin

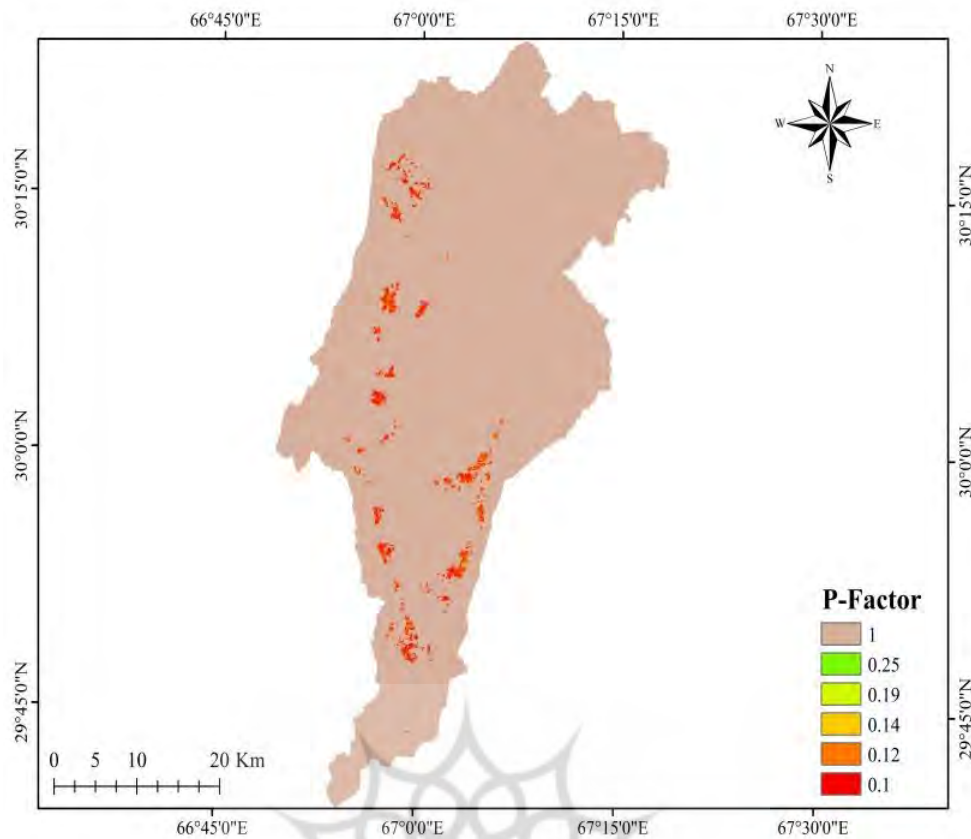


Figure 12: The P-Factor map of Quetta sub-basin

Estimation of Annual Soil Erosion (A)

Finally, the soil erosion equation was employed by multiplying all the factors (R, K, LS, C, and P) to signify the annual soil erosion (A) in the Quetta sub-basin of Pakistan. Before the overlay analysis, all the thematic layers were projected with WGS84/UTM Zone 42 N datum coordinate system in a resampled resolution of 10*10m for even usage in the ArcGIS environment. The resultant map was reclassified using natural break (Jenks), in to five classes: very low, low, moderate, high and very high erosion severity class. The results of this assessment are showcased in Figure 13, which vibrantly portrays the distribution of soil loss in the study region. The statistical observations in Table 4 revealed that the levels of soil erosion vary significantly, ranging from 0 to 866 (tons/ha/year). The majority of the study area, approximately 58%, is classified under the very low erosion severity class, with soil erosion levels being less than 13.58 t/ha/year. Low soil erosion, in the range of 13.58-44.16 t/ha/year, is found in 24% of the study region. However, the northern part (Takatu range), north-eastern part (Zarghoon range) eastern-central (Murder range), and western-southern zone (Chiltan range) of the study area, which are characterized by steep slopes and barren land, experience high to very high levels of soil erosion, ranging from 81.53-866.34 t/ha/year. Moderate erosion, in the range of 44.16 – 81.53 t/ha/year, covers 13% of the study area and occurs in the foothills of the mountains where agricultural land with slight slopes exists. These findings provide significant insights into the soil erosion levels at the Quetta sub-basin, highlighting the areas that require immediate attention and remedial measures.

Table 4: Spatial distribution of soil erosion

S.No.	Soil Erosion rate (tons/ha/year)	Area (hectare)	Covered (%)	Erosion Severity Class
1	0.000 - 13.589	100799.3	58.06022	Very Low
2	13.589 - 44.166	41793.14	24.07278	Low
3	44.166 - 81.538	22368.01	12.88394	Moderate
4	81.538 - 146.089	7472.98	4.304424	High
5	146.089 - 866.346	1178.21	0.678647	Very High

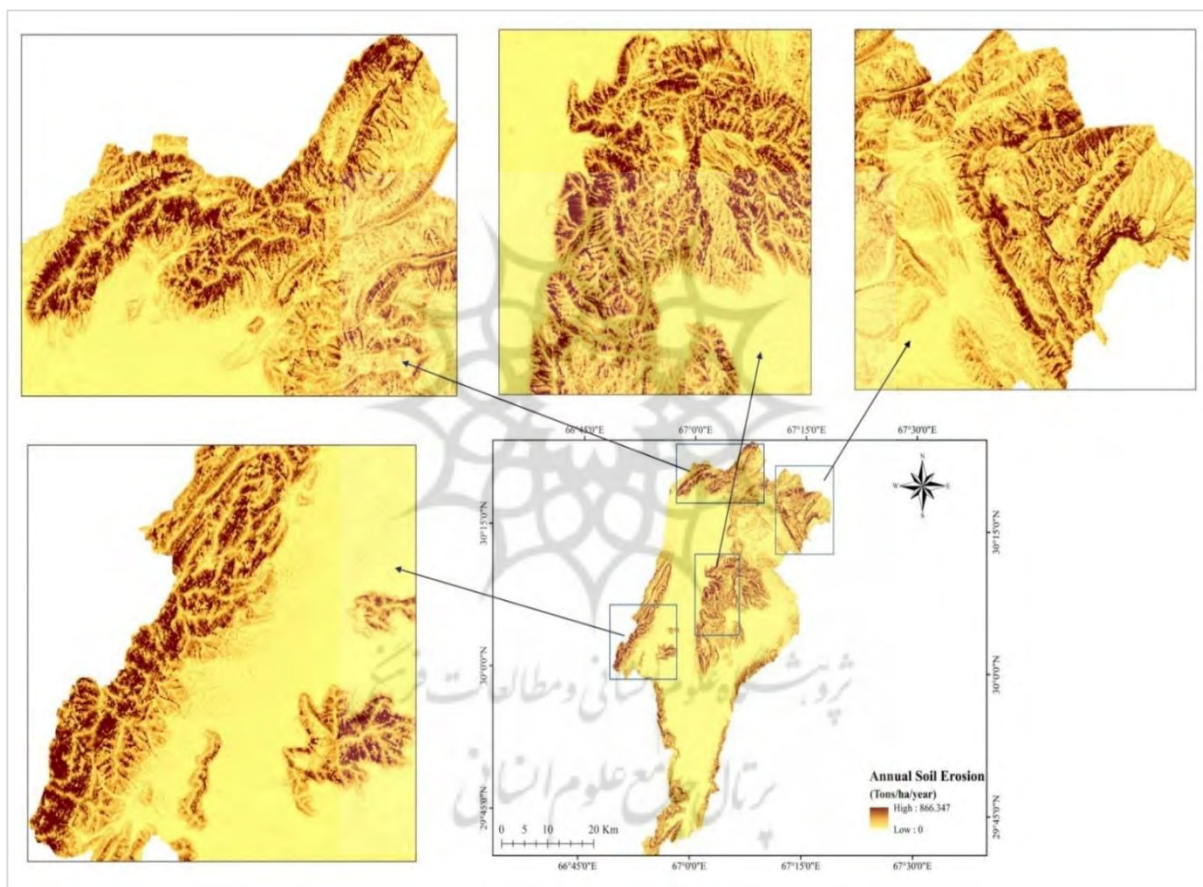


Figure 13: Annual soil erosion in Quetta sub-basin

Conclusions

Soil erosion is a geo-environmental concern worldwide. Soil erosion often cause due to natural factors such as rainfall, soil, topography, and land cover, as well as anthropogenic factors such as land use and support cover. The RUSLE model, an empirical model, is widely used to estimate soil erosion at a pixel level. By integrating the RUSLE model with GIS, soil erosion patterns can be accurately predicted. In this study, the RUSLE model was employed with geospatial data and GIS tools to estimate the annual soil erosion in Quetta, Pakistan. The approach involves merging various thematic layers into a GIS 10.8 environment, along with a Digital Elevation Model, Land Use Land Cover map, precipitation map, and soil map. The Annual Soil Erosion model has revealed that the study area is characterized by varying degrees of soil erosion, with erosion rate ranging from 0 to 866 tons per hectare per year. These high-risk erosion areas may have adverse effects

on groundwater recharge potential sites as well in the study area. Through the analysis of the results, it is evident that GIS tools and spatial remote sensing play a pivotal role in providing comprehensive descriptions of the spatial environment. This, in turn, greatly facilitates decision-making processes. Moreover, there is a lack of up-to-date field-based data for the study area for validation purposes. Therefore, it is advised to carry out field-based research to validate the results derived from the model and establish a dependable soil erosion database for the study area and country as well.

References

- Abuzar, M. (2012). Risk assessment of soil erosion in Ghabbir watershed, Potohar plateau through GIS modeling .
- Abuzar, M. K., Shakir, U., Ashraf, M. A., Mukhtar, R., Khan, S., Shaista, S., & Pasha, A. R. (2018). GIS based risk modeling of soil erosion under different scenarios of land use change in Simly watershed of Pakistan. *Journal of Himalayan Earth Sciences*, 51(2A), 132-143 .
- Alexandridis, T. K., Sotiropoulou, A. M., Bilas, G., Karapetsas, N., & Silleos, N. G. (2015). The effects of seasonality in estimating the C factor of soil erosion studies. *Land Degradation & Development*, 26(6), 596-603 .
- Ali, I., & Aftab, S. M. (2022). Climate Change and Human-Induced Factor Impacts on Quetta Valley Aquifer, Baluchistan, Pakistan. *Journal of Himalayan Earth Sciences*, 55(2), 21-45 .
- Anjum, S. A., Wang, L.-c., Xue, L.-l., Saleem, M. F., Wang, G.-x., & Zou, C.-m. (2010). Desertification in Pakistan: Causes, impacts and management. *J. Food Agric. Environ*, 8(1), 1203-1208 .
- Ashraf, A. (2020). Risk modeling of soil erosion under different land use and rainfall conditions in Soan river basin, sub-Himalayan region and mitigation options. *Modeling Earth Systems and Environment*, 6(1), 417-428 .
- Ashraf, A., Abuzar, M. K., Ahmad, B., Ahmad, M. M., & Hussain, Q. (2017). Modeling risk of soil erosion in high and medium rainfall zones of Pothwar region, Pakistan: Assessment of soil erosion risk. *Proceedings of the Pakistan Academy of Sciences: B. Life and Environmental Sciences*, 54(2), 67-77 .
- Bayati, K. M. (2016). Assessment And Predicting Of Soil Erosion Risk At Semi-Arid Mountain: Intergeration Of The Usle Model And Gis Technique For Soil Conservation Planning Case Study: Sareskandarchy Catchment, Eastern Slope Of Sahand Mountain .
- Esmali, A., Eshaghzadeh, A., Asghari, S., Mostafazadeh, R. (2024). Estimation of river bank erosion and effective factors in Polealmas-Gilande reach, Balkhlochai River in Ardabil, *Hydrogeomorphology*, 11(40), 101-87.
- Dutta, D., Das, S., Kundu, A., & Taj, A. (2015). Soil erosion risk assessment in Sanjal watershed, Jharkhand (India) using geo-informatics, RUSLE model and TRMM data. *Modeling Earth Systems and Environment*, 1, 1-9 .
- Fiener, P., Dostál, T., Krása, J., Schmaltz, E., Strauss, P., & Wilken, F. (2020). Operational USLE-based modelling of soil erosion in Czech Republic, Austria, and Bavaria—Differences in model adaptation, parametrization, and data availability. *Applied Sciences*, 10(10), 3647 .
- Gelagay, H. S., & Minale, A. S. (2016). Soil loss estimation using GIS and Remote sensing techniques: A case of Koga watershed, Northwestern Ethiopia. *International Soil and Water Conservation Research*, 4(2), 126-136 .
- Ghosal, K., & Das Bhattacharya, S. (2020). A review of RUSLE model. *Journal of the Indian Society of Remote Sensing*, 48, 689-707 .
- Gilani, H., Ahmad, A., Younes, I., & Abbas, S. (2022). Impact assessment of land cover and land use changes on soil erosion changes (2005–2015) in Pakistan. *Land Degradation & Development*, 33(1), 204-217 .
- Godarzi, A., Younesi, H., Shahinejad, B., Hassan Torabi. (2022). Numerical Modeling of Sediment Transfer and River Erosion in Flood Conditions Case study: Kashkan Catchment, *Hydrogeomorphology*, 31, 131-157.

- Hoseini ,H, Hakimi Asiabar ,S., Salavati ,M.(2023).Effect of vegetation and soil erosion on the hydro-geochemical quality of surface waters Case study: Qolyan River catchment area, Qalikh region, Lorestan,*Hydrogeomorphology*,34,167-191.
- Kayet, N ,Pathak, K., Chakrabarty, A., & Sahoo, S. (2018). Evaluation of soil loss estimation using the RUSLE model and SCS-CN method in hillslope mining areas. *International Soil and Water Conservation Research*, 6(1), 31-42 .
- Kebede, Y. S., Endalamaw, N. T., Sinshaw, B. G., & Atinkut, H. B. (2021). Modeling soil erosion using RUSLE and GIS at watershed level in the upper beles, Ethiopia. *Environmental Challenges*, 2, 100009 .
- Koirala, P., Thakuri, S., Joshi, S., & Chauhan, R. (2019). Estimation of soil erosion in Nepal using a RUSLE modeling and geospatial tool. *Geosciences*, 9(4), 147 .
- Madadi,A.,Asghari Saraskanrood,S.,Hajatpourghaleroodkhany,H.(2024).Investigating land use changes with an emphasis on forest cover and its effects on soil erosion using object-oriented classification and the MARCOS multi-criteria technique case study: Ghaleroodkhan Fuman watershed, ydrogeomorphology,11(39), 167-144.
- Moore, I. D., & Burch, G. J. (1986). Physical basis of the length slope factor in the universal soil loss equation. *Soil Science Society of America Journal*, 50(5), 1294-1298 .
- Moore, I. D., & Nieber, J. L. (1989). Landscape assessment of soil erosion and nonpoint source pollution. *Journal of the Minnesota Academy of Science*, 55(1), 18-25 .
- Morgan, R., Quinton, J., Smith, R., Govers, G., Poesen, J., Auerswald, K., . . . Styczen, M) .(1999).The European soil erosion model (EUROSEM): A dynamic approach for predicting sediment transport from fields and small catchments-Reply. *Earth Surface Processes and Landforms*, 24(6), 567-568 .
- Nasir, A., Uchida, K., & Ashraf, M. (2006). Estimation of soil erosion by using RUSLE and GIS for small mountainous watersheds in Pakistan. *Pakistan Journal of Water Resources*, 10(1), 11-21 .
- Panagos, P., Borrelli, P., Poesen, J., Meusburger, K., Ballabio, C., Lugato, E., . . . Alewell, C. (2016). Reply to the comment on “The new assessment of soil loss by water erosion in Europe” by Fiener & Auerswald. *Environmental science & policy*, 57, 143-150 .
- Panditharathne, D., Abeysingha, N., Nirmanee, K., & Mallawatantri, A. (2019). Application of revised universal soil loss equation (Rusle) model to assess soil erosion in “kalu Ganga” River Basin in Sri Lanka. *Applied and Environmental Soil Science*, 2019, 1-15 .
- Pimentel, D., & Burgess, M. (2013). Soil erosion threatens food production. *Agriculture*, 3(3), 443-463 .
- Poggio, L., De Sousa, L. M., Batjes, N. H., Heuvelink, G. B., Kempen, B., Ribeiro, E., & Rossiter, D. (2021). SoilGrids 2.0: producing soil information for the globe with quantified spatial uncertainty. *Soil*, 7(1), 217-240 .
- Qin, W., Guo, Q., Cao, W., Yin, Z., Yan, Q., Shan, Z., & Zheng, F. (2018). A new RUSLE slope length factor and its application to soil erosion assessment in a Loess Plateau watershed. *Soil and tillage research*, 182, 10-24 .
- Renard, K. G. (1997). *Predicting soil erosion by water: a guide to conservation planning with the Revised Universal Soil Loss Equation (RUSLE)*: US Department of Agriculture, Agricultural Research Service.
- Robinson, D. A., Panagos, P., Borrelli, P., Jones, A., Montanarella, L., Tye, A., & Obst, C. G. (2017). Soil natural capital in Europe; a framework for state and change assessment. *Scientific reports*, 7(1), 6706 .
- Sadeghi, S. H., Nouri, H., & Faramarzi, M. (2017). Assessing the spatial distribution of rainfall and the effect of altitude in Iran (Hamadan Province).*Air, soil and water research*, 10, 1178622116686066 .
- Shit, P. K., Nandi, A. S., & Bhunia, G. S. (2015). Soil erosion risk mapping using RUSLE model on Jhargram sub-division at West Bengal in India. *Modeling Earth Systems and Environment*, 1, 1-12 .
- Singh ,G., Chandra, S., & Babu, R. (1981). Soil loss and prediction research in India, Central Soil and Water Conservation Research Training Institute. *Bulletin No T-12 D*, 9(1981).

- Singh, M. C., Sur, K., Al-Ansari, N., Arya, P. K., Verma, V. K., & Malik, A. (2023). (GIS integrated RUSLE model-based soil loss estimation and watershed prioritization for land and water conservation aspects. *Frontiers in Environmental Science*, 11, 1136243 .
- Stone, R., & Hilborn, D. (2012). Universal soil loss equation (USLE) factsheet. *Ministry of Agriculture, Food and Rural Affairs order*(12-051).
- Toumi, S., Meddi, M., Mahé, G., & Brou, Y. T. (2013). Cartographie de l'érosion dans le bassin versant de l'Oued Mina en Algérie par télédétection et SIG. *Hydrological Sciences Journal* . ۱۵۵۸-۱۵۴۲ , (۷) ۵۸ ,
- Tucker, C. J. (1979). Red and photographic infrared linear combinations for monitoring vegetation. *Remote sensing of Environment*, 8(2), 127-150 .
- Ullah, R., Mohiuddin, S., & Panhwar, S. K. (2023). Metal transportation mechanism by rainfall runoff as a contribution to the bioaccumulation in seafood. *Environmental Monitoring and Assessment*, 195(3), 362 .
- Ullah, S., Ali, A., Iqbal, M., Javid, M., & Imran, M. (2018). Geospatial assessment of soil erosion intensity and sediment yield: a case study of Potohar Region, Pakistan. *Environmental Earth Sciences*, 77, 1-13 .
- Wischmeier, W. H., & Smith, D. D. (1978). *Predicting rainfall erosion losses: a guide to conservation planning*: Department of Agriculture, Science and Education Administration.
- Yue-Qing, X., Jian, P., & Xiao-Mei, S. (2009). RETRACTED ARTICLE: Assessment of soil erosion using RUSLE and GIS: a case study of the Maotiao River watershed, Guizhou Province, China. *Environmental geology*, 56, 1643-1652 .

